

High Intensity LED Strobe Light



Bright visual notification of telephone, safety, and security events. Effective and selectable flash patterns radiate light 360 x 180 degrees for visibility in all directions. Alerts employees in noisy locations and eliminates noise in quiet environments.

Eight efficient and powerful LEDs provide a range of visible effects. Aggressive flash patterns ensure effectiveness in large noisy industrial areas, while milder flash patterns are suitable for less urgent notification or offices.

Available lens covers in amber, blue, or red provide even more choice for distinguishing telephone and safety events from fire or other alarm systems.

Telephone ring (from FXS port or ATA) or dry contact (relay) activation make the 1128 Strobe Light easy to integrate with any unified communication server or security system.

Adaptable.

Optional amber, blue and red lens covers.



Flexible.

Wall or ceiling mountable.

Features

- Ring or dry contact activated
- Selectable flash pattern, rate and intensity
- Optional amber, blue or red covers
- Wall or ceiling mountable
- Weather resistant

Benefits

- 16 flash patterns suitable for all applications
- OSHA or ADA compliance
- Distinguishable from fire alarm
- Higher efficiency and longer life than xenon strobe lights
- Notification in noisy or quiet environments

1128 LED Strobe Light


ALGO

1128 Specifications

	Min.	Typ.	Max.	Units
Supply Voltage	12	24	28	Vdc
Supply Current				
Idle		20		mA
Operating (12V)			1000	mA
Operating (24V)			500	mA
Dry Contact Detection				
Contact and Loop Resistance	0		2	kOhm
Open Current Voltage		5		Vdc
Loop Current			1	mA
Telephone Ring Detection				
Ring Detect Voltage 20/25 Hz		20		Vrms
Input Impedance	50			kOhm
Low Voltage Detection				
Input Impedance		4		kOhm
Input Voltage (DC of AC)	3		30	V

Connections

- Four flash pattern switch located in the wiring cavity
- Two installation scenarios – “hard wired” or “plug and play”

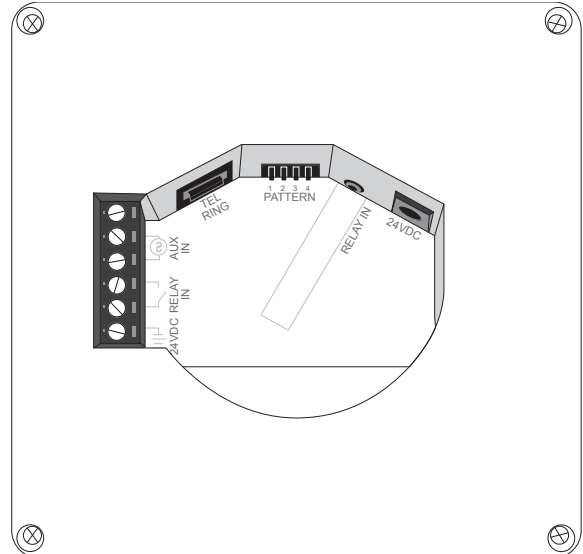

Flash Patterns

No	Switch	Description	Application		Intensity/Strobe		
			Wall	Ceiling	High	Med	Low
15	1111	Classic strobe slow	✓	✓		✓	
14	1110	Classic strobe medium	✓	✓		✓	
13	1101	Classic strobe fast	✓	✓		✓	
12	1100	Flashing	✓	✓		✓	
11	1011	Side to side	✓			✓	
10	1010	Pulse	✓	✓			✓
9	1001	Steady bright	✓	✓			✓
8	1000	Steady dim	✓	✓			✓
7	0111	Rotating strobe	✓	✓	✓		
6	0110	Multi-strobe slow bright	✓	✓	✓		
5	0101	Multi-strobe slow dimmed	✓	✓		✓	
4	0100	Multi-strobe fast bright	✓	✓	✓		
3	0011	Multi-strobe fast dimmed	✓	✓		✓	
2	0010	Multi-strobe dim holdover	✓	✓	✓		
1	0001	Rotate slow		✓		✓	
0	0000	Rotate fast		✓		✓	

What's Included in the Box

- 1128 Strobe unit with clear lens
- Power supply
- Mounting bracket
- Gaskets
- Colored lens cover (if color option ordered)
- User Guide

Order Codes

1128	LED Strobe Light, clear lens included.
1128A	LED Strobe Light, amber lens cover included.
1128B	LED Strobe Light, blue lens cover included.
1128R	LED Strobe Light, red lens cover included.
1128ABR	LED Strobe Light, amber, red, and blue lens cover included.

DC1128BR-01 March 2014 © Algo Communication Products Ltd. All rights reserved. Algo® is a registered trademark of Algo Communication Products Ltd.
Note - Specifications are subject to change without notice. Some features may only be available in specific firmware or hardware releases.

www.algosolutions.com

Algo Communication Products Ltd., 4500 Beedie Street, Burnaby, BC Canada V5J 5L2
Sales: +1-604-454-3790; sales@algosolutions.com