




Classroom

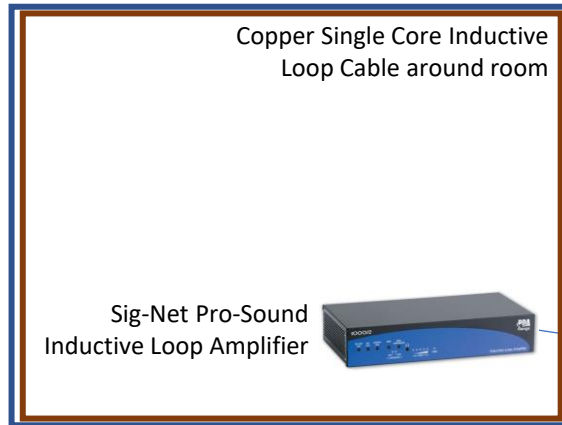

Headmaster's Office

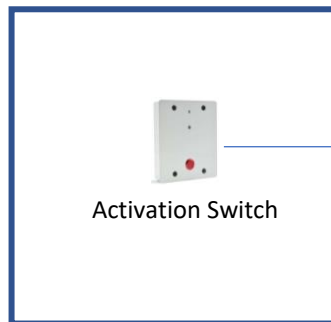

Server Room

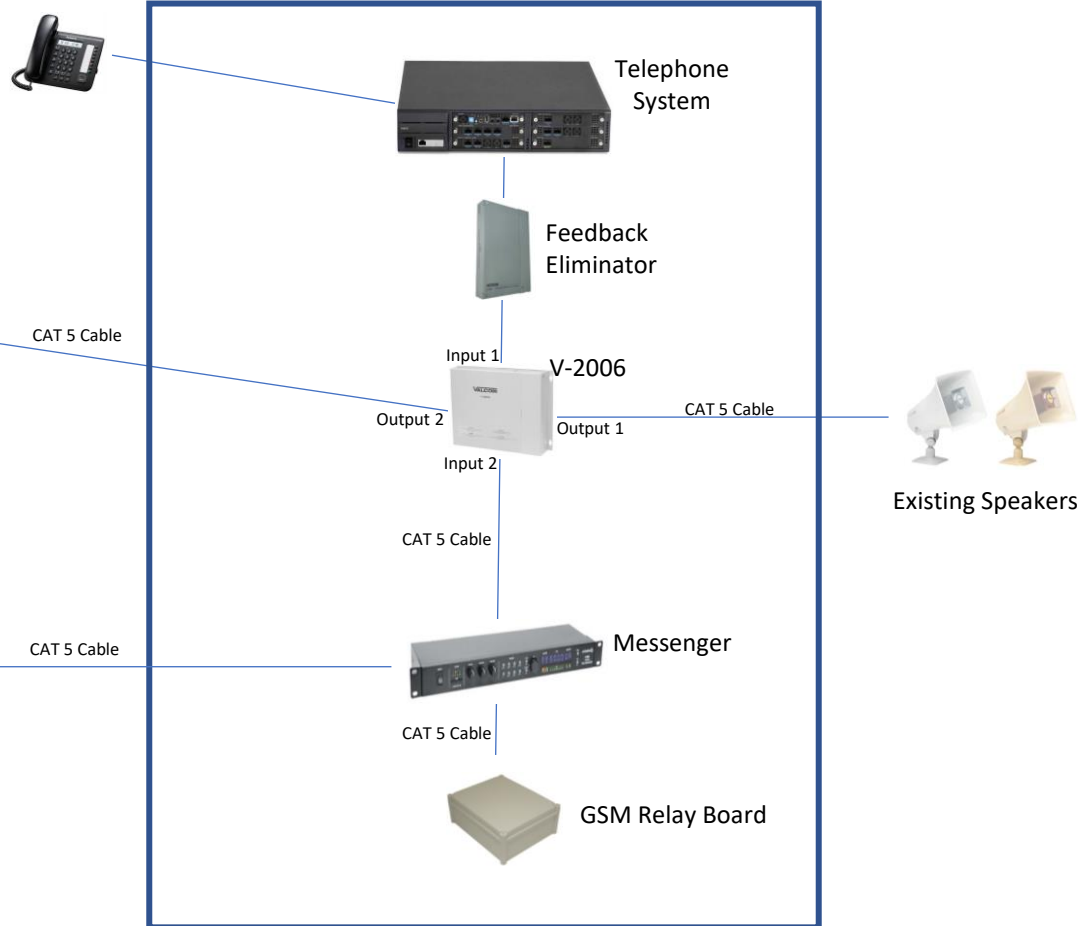

Notes

- The amplifier needs to be positioned in the same room as the Copper Inductive loop
- The loop cable if possible, should be installed under floor covering or at skirting board / Dado rail height
- Please consider the signal will bleed up to 3m each side of the cable
- The copper loop cable needs to be kept away from electrical devices as lighting